

**Model : ABYG30LRTE / ABYG36LRTE / ABYG45LRTA /
ABYG36LRTA [3phase] / ABYG45LRTA [3phase] / ABYG54LRTA [3phase]**



Wireless R.C.



For ABYG30/36LRTE



For ABYG45LRTA (Single -phase)




For ABYG36/45/54LRTA

Specifications

Model No.	Indoor unit		ABYG30LRTE	ABYG36LRTE	ABYG45LRTA	ABYG45LRTA	ABYG36LRTA	ABYG45LRTA	ABYG54LRTA	
	Outdoor unit		AOYG30LETL	AOYG36LETL	AOYG45LBTC	AOYG45LETL	AOYG36LATT	AOYG45LATT	AOYG54LATT	
Power Source			Single-phase, ~230V, 50Hz				3-phase, ~400V, 50Hz			
Capacity	Cooling	kW	8.5 (2.8-10.0)	9.4 (2.8-11.2)	12.1 (4.0-13.0)	12.1 (4.0-13.3)	10.0 (4.7-11.4)	12.5 (5.0-14.0)	14.0 (5.4-16.0)	
	Heating		10.0 (2.7-11.2)	11.2 (2.7-12.7)	13.3 (4.2-15.2)	13.3 (4.2-15.5)	11.2 (5.0-14.0)	14.0 (5.4-16.2)	16.0 (5.8-18.0)	
Input Power	Cooling/Heating	kW	2.65/2.77	2.93/3.02	4.29/3.84	3.77/3.68	2.84/2.87	3.89/3.88	4.65/4.67	
EER	Cooling	W/W	3.21	3.21	2.82	3.21	3.52	3.21	3.01	
COP	Heating		3.61	3.71	3.46	3.61	3.90	3.61	3.43	
Pdesign	Cooling/Heating(-10°C)	kW	8.5/8.0	9.4/8.7	-	-	10.0/10.0	-	-	
SEER	Cooling	W/W	6.10	6.00	-	-	6.10	-	-	
SCOP	Heating		4.20	4.10	-	-	4.10	-	-	
Energy Efficiency Class	Cooling	A++		A+	-	-	A++	-	-	
	Heating	A+		A+	-	-	A+	-	-	
Max. Operating Current	Cooling/Heating	A	17.0/17.0	18.5/20.0	23.5/23.5	21.0/21.0	7.9/7.9	8.9/8.9	9.9/9.9	
Annual Energy Consumption	Cooling	kWh/a	487	548	-	-	573	-	-	
	Heating		2662	2965	-	-	3414	-	-	
Moisture Removal		l/h	2.5	3.0	4.0	4.0	3.0	4.5	5.0	
Sound Pressure Level	Indoor (Cooling)	H/M/L/Q	45/43/37/32	47/43/37/32	49/45/39/34	49/45/39/34	47/43/37/32	49/45/39/34	51/48/42/38	
	Indoor (Heating)	H/M/L/Q	45/43/37/32	47/43/37/32	49/45/39/34	49/45/39/34	47/43/37/32	49/45/39/34	51/48/42/38	
	Outdoor(Cooling/Heating)	High	53/55	54/55	58/58	55/55	51/53	54/54	55/56	
Sound Power Level	Indoor(Cooling/Heating)	High	57/60	60/61	-	-	61/61	-	-	
	Outdoor(Cooling/Heating)	High	68/69	69/70	-	-	67/69	-	-	
Airflow Rate	Indoor / Outdoor	High	m³/h	1660/3600	1900/3800	2100/4650	2100/6200	1900/6200	2100/6900	2300/6900
Net Dimensions H x W x D	Indoor	mm	240×1660×700	240×1660×700	240×1660×700	240×1660×700	240×1660×700	240×1660×700	240×1660×700	
		kg(lbs)	46 (101)	46 (101)	46 (101)	46 (101)	46 (101)	46 (101)	48 (106)	
Weight	Outdoor	mm	830×900×330	830×900×330	914×970×370	1290×900×330	1290×900×330	1290×900×330	1290×900×330	
		kg(lbs)	61 (134)	61 (134)	75 (165)	86 (189)	104 (229)	104 (229)	104 (229)	
Connection Pipe Diameter (Liquid / Gas)		mm	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	
Drain port Diameter (I.D./O.D.)		mm	22.0/25.6	22.0/25.6	22.0/25.6	22.0/25.6	22.0/25.6	22.0/25.6	22.0/25.6	
Max Pipe Length (Pre-Charge)		m	50 (20)	50 (20)	50 (20)	50 (20)	75 (30)	75 (30)	75 (30)	
Max Height Difference			30	30	30	30	30	30	30	
Operation Range	Cooling	°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	
	Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	
Refrigerant	Type (Global Warming Potential)		R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	R410A (2,088)	
	Charge	kg(CO2eq-T)	2.10 (4.4)	2.10 (4.4)	2.90 (6.1)	3.35 (7.0)	3.45 (7.2)	3.45 (7.2)	3.45 (7.2)	


Optional parts

- Wired Remote Controller: UTY-RNNYM, UTY-RVNYM
- Simple Remote Controller: UTY-RSNYM
- Drain Pump Unit: UTR-DPB24T
- Flange: UTD-RF204

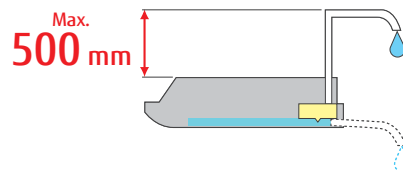

Dimensions

(Unit : mm)

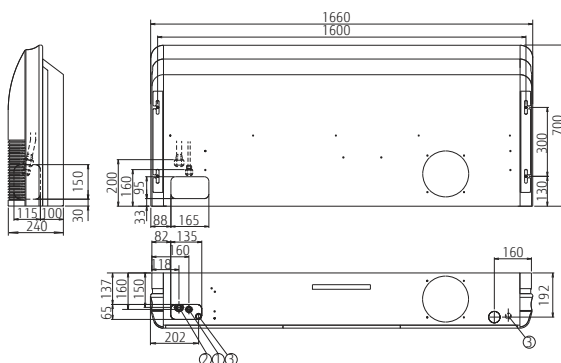

- ① Refrigerant piping flare connection (Liquid)
- ② Refrigerant piping flare connection (Gas)
- ③ Drain piping connection